

UNIVERSAL PRODUCT LINE

SERIES: 123A, 4123A, 323A, 4323A

STEEL EXTERNALS CONSTRUCTION

FEATURES & BENEFITS

- For refinery and petrochemical applications
- Recommended for extremely high temperatures
- Widest range of sealing options available




Component Seal

Cartridge Seal

Seal chamber accepts packing and a variety of component and cartridge style mechanical and lip seals, in both single and double mechanical seal configurations

Double row ball or tapered roller bearings for axial thrust control

Threaded one-piece bearing housing allows for easy end clearance adjustment

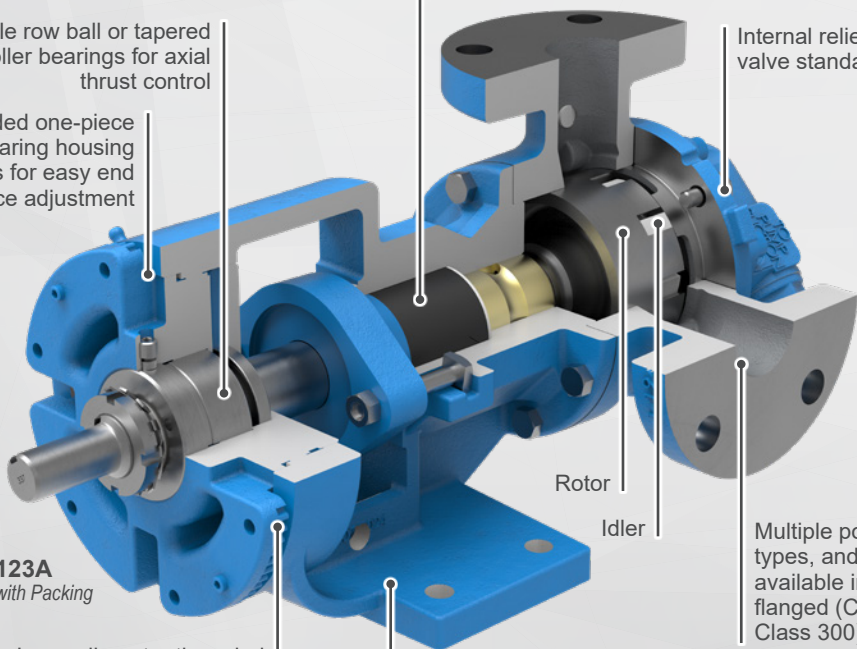

Internal relief valve standard*

Rotor

Idler

Multiple port sizes, types, and ratings are available including flanged (Class 150, Class 300)

H123A

Shown with Packing

Large diameter threaded bearing housing allows easy removal of cartridge seals

One-piece cast bracket with seal between bearings provides rigid foundation to maximize seal and bearing life



CAPACITY

to 1,600 GPM
(363 m³/h)



PRESSURE

to 200 PSI
(14 BAR)



TEMPERATURE

-20°F to +800°F
(-30°C to +430°C)



VISCOSITY

28 to 2,000,000 SSU
(0.1 to 440,000 cSt)




VIKING PUMP®

* RS size is standard with jacketed head, no valve.

PERFORMANCE

MODELS		SPECIFICATIONS				
Non-Jacketed		Performance			Standard Ports	
Packing	Mechanical Seal	Max Speed, RPM	GPM	m ³ /h	Size, Inches	Type
H123A	H4123A	1750	15	3.4	1.5	Flange
HL123A	HL4123A	1750	30	6.8	1.5	Flange
K123A	K4123A	780	75	17	2	Flange
KK123A	KK4123A	780	100	23	2	Flange
LQ123A	LQ4123A	640	135	31	2.5	Flange
LL123A	LL4123A	520	140	32	3	Flange
LS123A	LS4123A	640	200	45	3	Flange
Q123A	Q4123A	520	300	68	4	Flange
QS123A	QS4123A	520	500	114	6	Flange
N323A	N4323A	350	600	136	6	Flange
R323A	R4323A	280	1,100	250	8	Flange
RS323A	RS4323A	280	1,600	363	10	Flange

CURVES

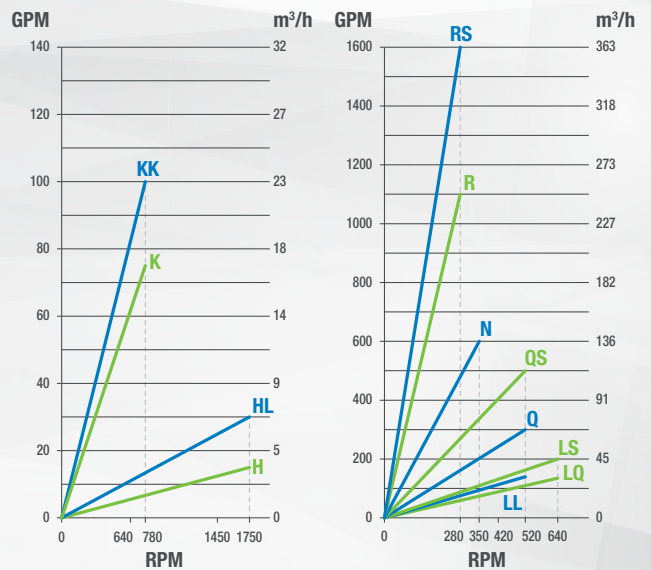

PORTING

- Right Angle (90°) (Rotatable Casing), H-Q
- Opposite (180°) (Rotatable Casing), QS-RS
- Flanged (ANSI)

SEALING

- Packing
- Component Mechanical Seal
- Cartridge Mechanical Seal
- Cartridge Triple Lip Seal
- API 682 Seal (4223AX, 4323AX Series)

MOUNTING

- Foot Mount

OPTIONS

- Jacketing (223A, 4223A Series)
- Low temperature carbon steel down to -50°F (-45°C)

DRIVES

- Ⓡ Offset Gear Reducer Drive
- Ⓟ Purchased Gear Reducer Drive
- ⓓ Direct-Mounted Drive (H-HL)
- Ⓥ V-Belt Drive

LIQUIDS

- Crude Oil
- Fuels
- Lube Oil
- Basic Petrochemicals
- Asphalts & Bitumens
- Heat Transfer Fluids



VIKING PUMP®

VIKING PUMP, INC.

A Unit of IDEX Corporation
406 State Street
Cedar Falls, Iowa 50613 U.S.A.
vikingpump.com

Contact Your Stocking Distributor Today

Distributed By:

AUSTRALIAN DISTRIBUTOR



CALL 1300 789 466

When Pump Knowledge Matters
www.kelairpumps.com.au

United States
vikingpump.com

Cedar Falls, Iowa
Phone: (319) 266-1741

Canada
vikingpumpcanada.com

Windsor, Ontario
Phone: (519) 256-5438

Europe & Africa
vikingpump.com

Shannon, Ireland
Phone: +353 (61) 471933

Asia-Pacific
idexfmi-asia.com

China - Shanghai
Phone: +86-21-5241-5599
India - Mumbai
Phone: +91-22-6643-5563
Singapore
Phone: +65-6684-7305

Middle East
vikingpump.com

Dubai, UAE
Phone: +971 4 2600300

Latin America
vikingpump.com

Australia & New Zealand
vikingpump.com

