

POLYVINYL ACETATE (PVAc)



Polyvinyl Acetate, or PVAc, is a colorless, odorless, tasteless, non-toxic, transparent, thermoplastic solid. It is used in latex water paints, in hot melt and other types of adhesives, for coating and finishing fabrics, as a component of lacquers, inks and in caulking compounds and chewing gum. PVAc is insoluble in water, oils and fats, but soluble in alcohols, esters, benzene and ketones.

PVAc APPLICATIONS:

- Transfer of process intermediaries
- Transfer of finished product

VIKING IN THE PROCESS:

One of the most commonly used polymers as an adhesive, Polyvinyl Acetate is a shear sensitive liquid that can setup when not moving in the process. For these reasons, Viking pumps are able to handle PVAc as the pumps are low shear and have optional features that promote fluid circulation in the pump when operating.


AUSTRALIAN DISTRIBUTOR



CALL 1300 789 466
When Pump Knowledge Matters
www.kelairpumps.com.au


SUGGESTED PUMPS:

1124A SERIES™

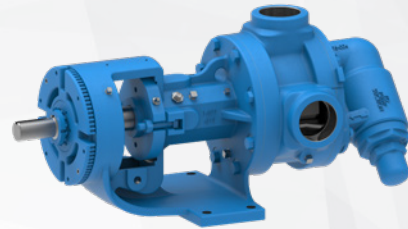

- Cast Iron
- Abrasive resistant materials & sealing option
- Low shear
- Capacities to 400 GPM

4124A SERIES™

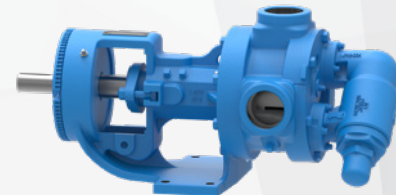

- Cast Iron
- Cartridge lipseal sealing options
- Capacities to 500 GPM

4127A SERIES™



- 316 Stainless Steel
- Cartridge lipseal sealing options
- Capacities to 320 GPM