




WSP™ Self-Primer Pump

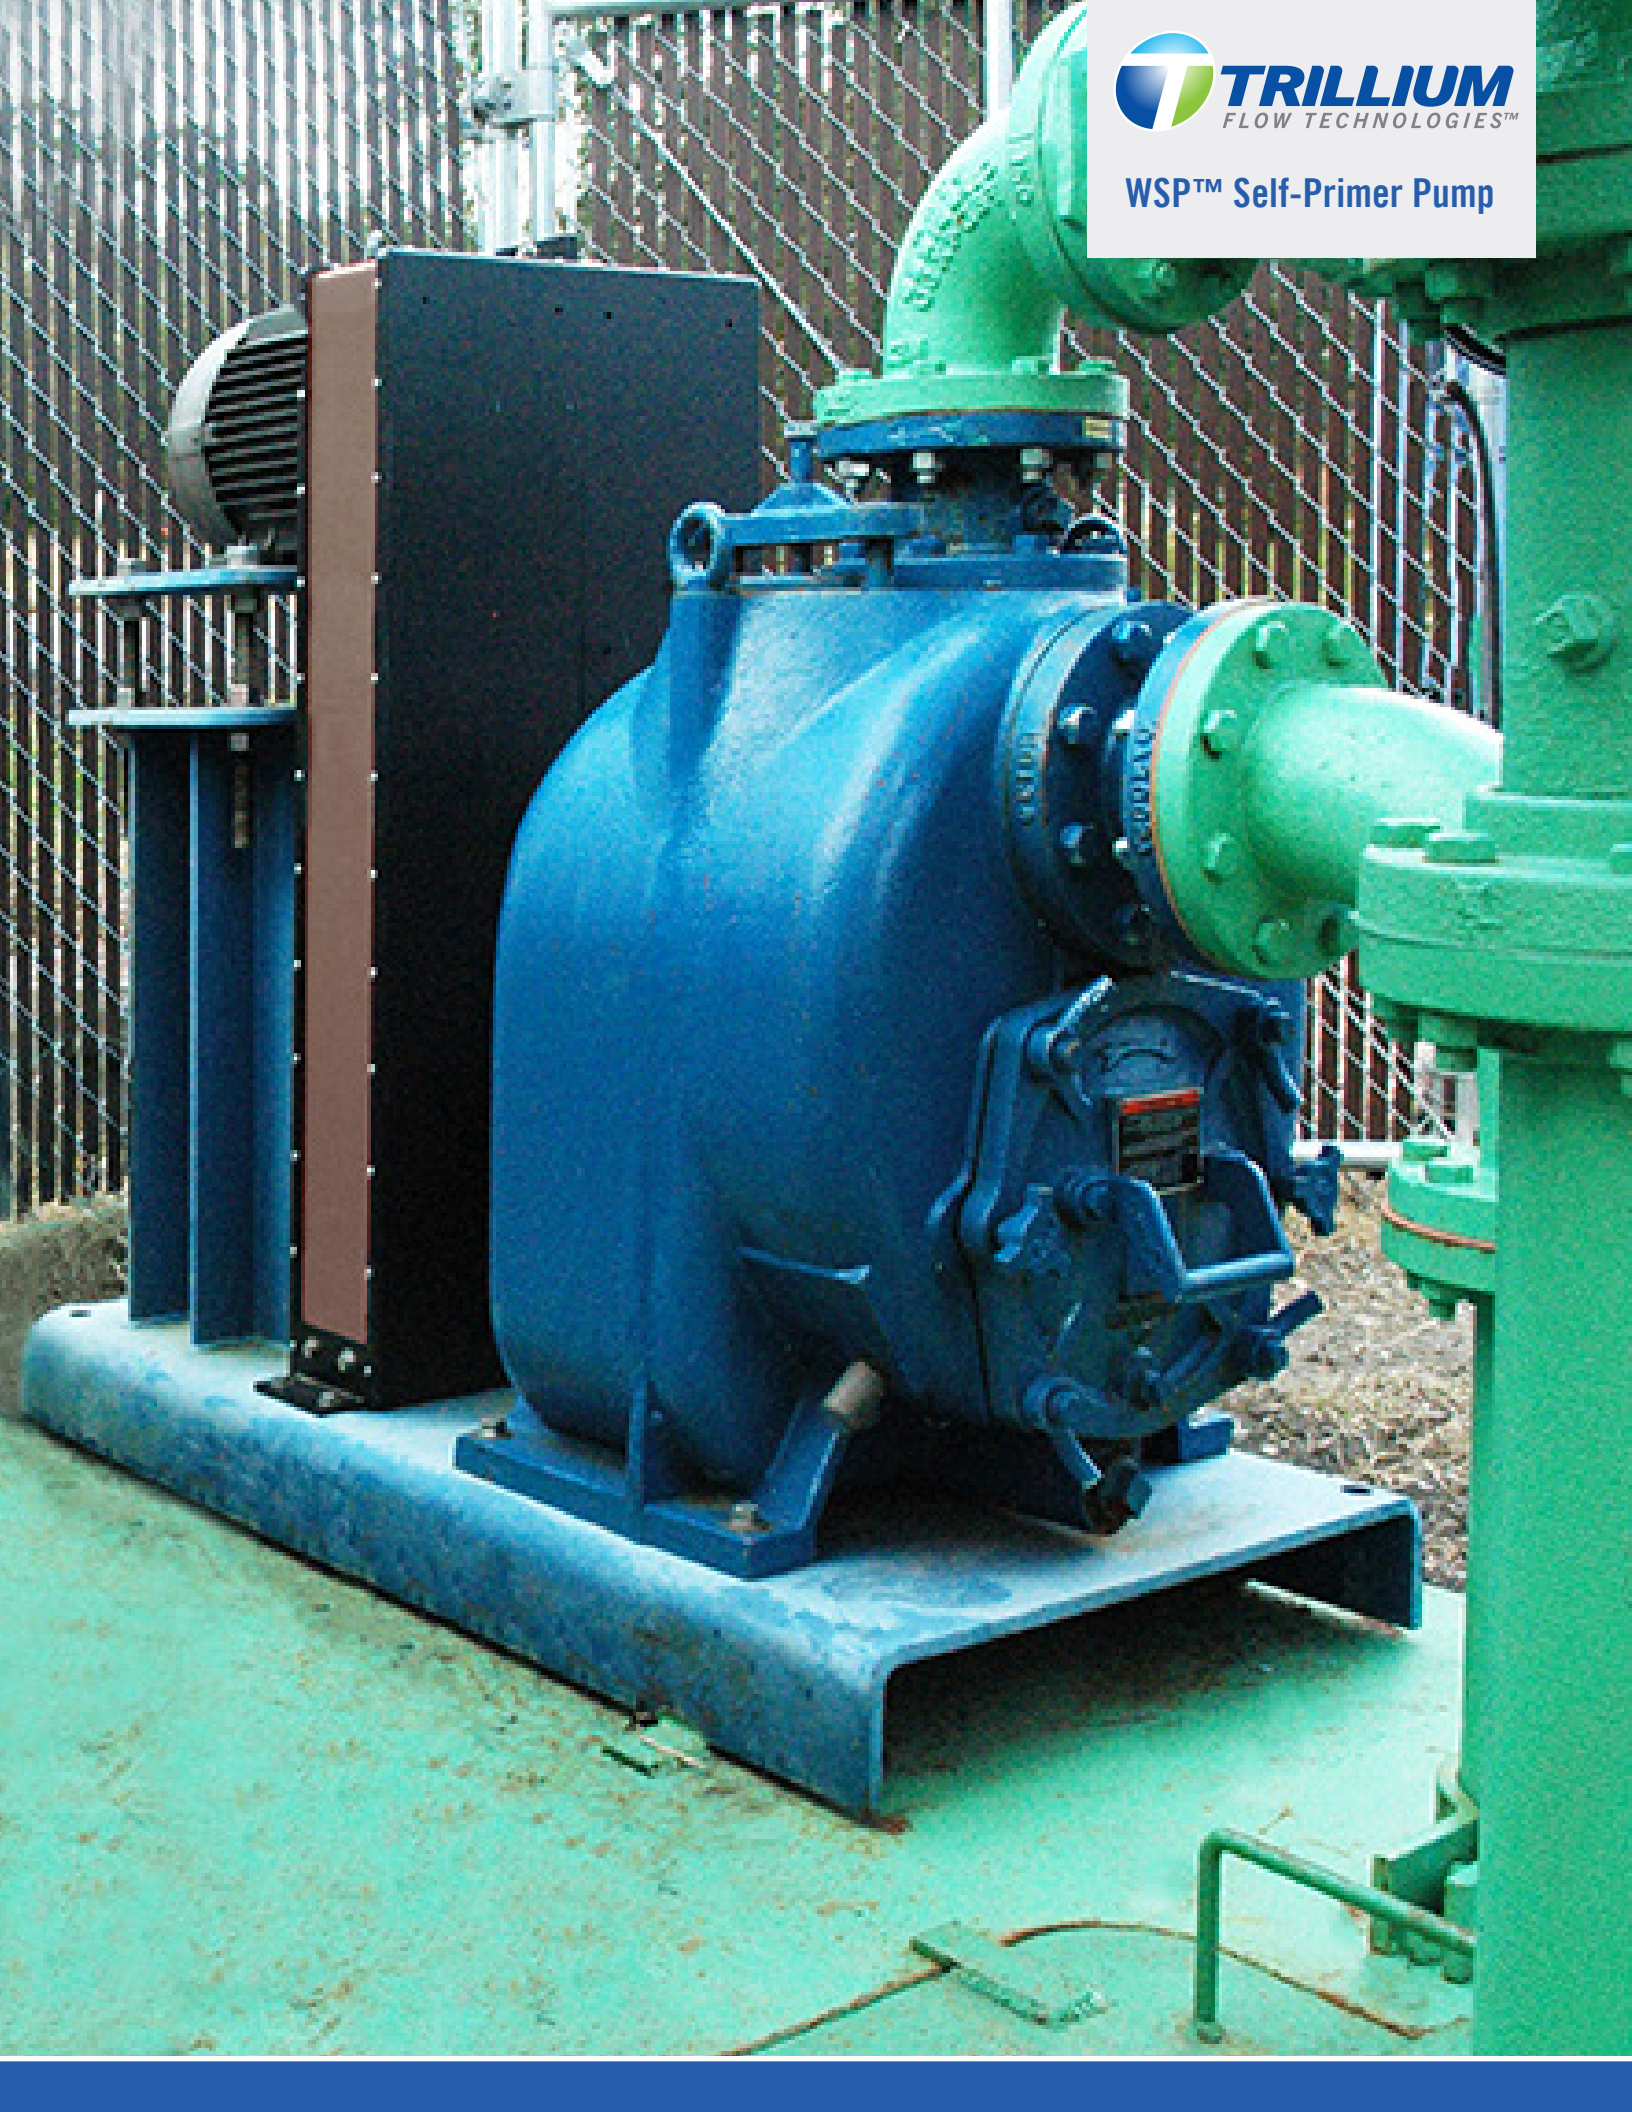



WSP Self-Primer Pump

The WSP self-primer pump is a rugged and dependable self-priming, solids handling, trash pump. Distinguishable from our competitors, the WSP self-primer pump design allows for a shim-less, tool-less impeller adjustment and ease of suction flap valve replacement.

The Buzzsaw™ wear plate is a standard feature on WSP self-primer pumps. With an aggressive saw tooth shaped profile, its shearing of stringy materials as they pass through the pump prevents clogs before they can form. The Buzzsaw wear plate helps prevent the WSP self-primer pump from running

in a state of partial clog and allows the pump to run at higher overall efficiencies while lowering maintenance costs, extending valuable runtime. The Buzzsaw wear plate is not available in high-head models.

Equal in importance to maintenance is safety. The WSP self-primer pump is designed with the added benefit of the fill port cover and clamp bar assembly. The recessed bolt-locking construction and anti-rotation design of the clamp bar assembly prevents accidental breach of the fill port cover, protecting the operator from scalding burns.

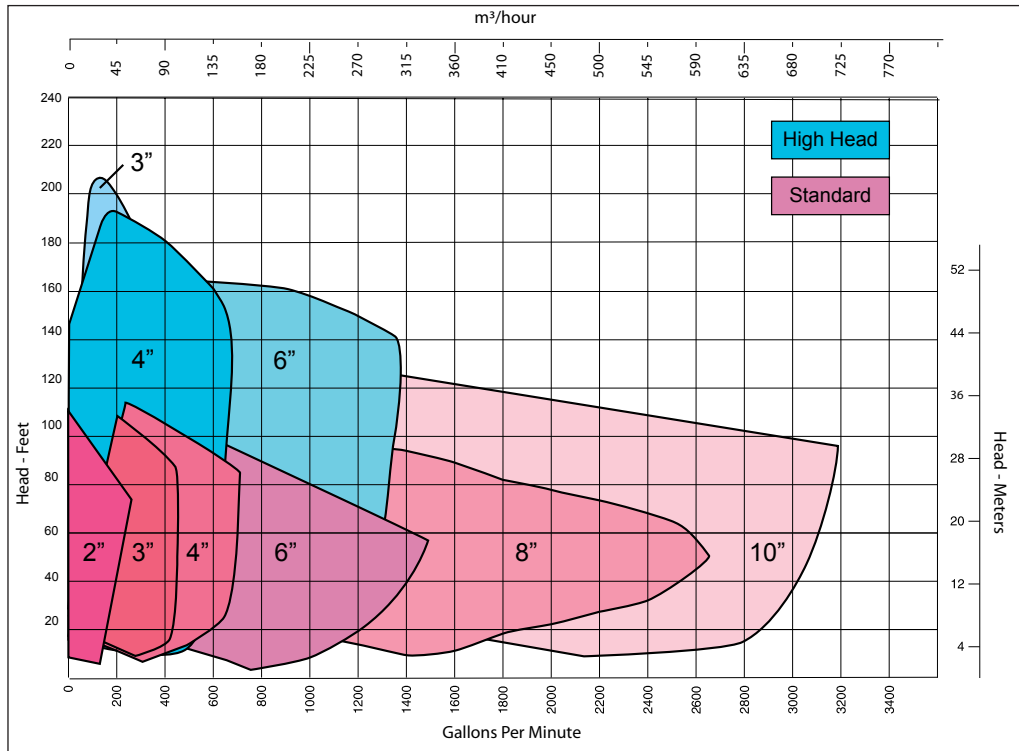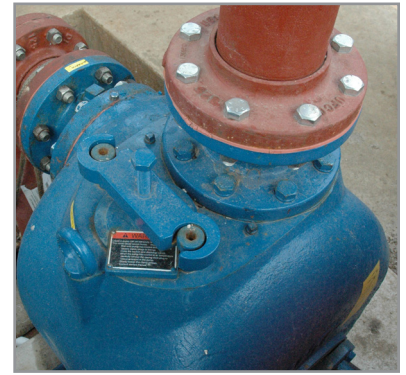

APPLICATIONS

Municipal and industrial waste water
 Metal machining
 Production, manufacturing
 Dewatering
 Mining and minerals
 Winery

Automotive
 Beef, pork, poultry processing
 Pulp and paper
 Tanker truck unloading
 Drilling mud recovery
 Food and beverage

STANDARD FEATURES

17-4PH Stainless steel shaft
 Shim-less impeller adjustment
 Solid silicon carbide seal faces
 Flanged suction and discharge
 Two-piece bearing housing

Carbon steel Impeller
 Ductile Iron casing
 Tool-less impeller adjustment
 Advanced safety features
 Buzzsaw wear plate (not available in high-head models)

WSP Self-Primer Pump




Size	Flow	Heads	Repriming Lift	Solids Size
2 inch (50 mm)	to 225 GPM (51 m ³ /hr)	to 103 ft (31 m)	up to 24 ft (7.3 m)	1.5 inch (38 mm)
3 inch (75 mm)	to 450 GPM (102 m ³ /hr)	to 112 ft (34 m)	up to 25 ft (7.6 m)	2.5 inch (63.5 mm)
4 inch (100 mm)	to 730 GPM (166 m ³ /hr)	to 119 ft (36 m)	up to 25 ft (7.6 m)	3 inch (75 mm)
6 inch (150 mm)	to 1,480 GPM (336 m ³ /hr)	to 111 ft (34 m)	up to 25 ft (7.6 m)	3 inch (75 mm)
8 inch (200 mm)	to 2,620 GPM (595 m ³ /hr)	to 109 ft (33 m)	up to 23 ft (7 m)	3 inch (75 mm)
10 inch (250 mm)	to 3,200 GPM (727 m ³ /hr)	to 133 ft (41 m)	up to 22 ft (6.7 m)	3 inch (75 mm)

WSP High Head Self-Primer Pump



Size	Flow	Heads	Repriming Lift	Solids Size
3 inch (75 mm)	to 370 GPM (84 m ³ /hr)	to 210 ft (64 m)	up to 23 ft (7 m)	0.81 inch (20 mm)
4 inch (100 mm)	to 650 GPM (148 m ³ /hr)	to 190 ft (58 m)	up to 17 ft (5.1 m)	1.12 inch (28 mm)
6 inch (150 mm)	to 1360 GPM (309 m ³ /hr)	to 175 ft (53 m)	up to 15 ft (4.5 m)	1.25 inch (32 mm)

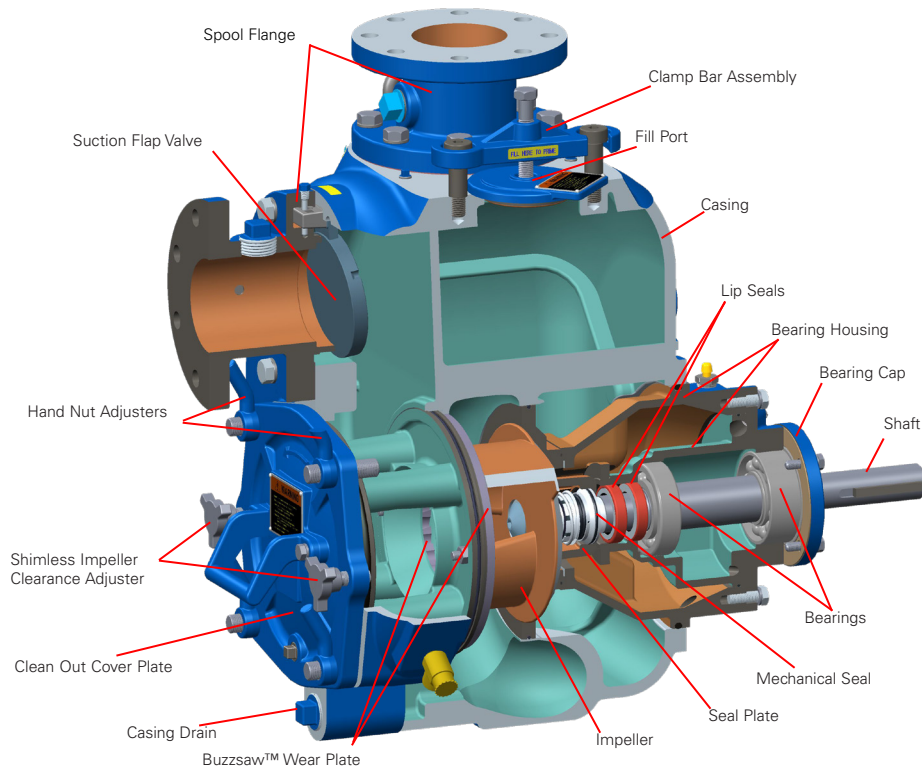

AVAILABLE UPGRADES

Buzzsaw Wear Plate

- 316 Stainless steel
- Wear-resistant Alloy (400 BHN)

Casing

- CD4MCu

Impeller and Seal Plate

- High-chrome
- CD4MCu

Mechanical Seal

- Tungsten carbide faces




WSP Self-Primer Pump

440 West 800 South
Salt Lake City, Utah 84101
USA

T 801 359 8731
www.trilliumflow.com

Copyright © 2019, 2017, 2015, 2014, Trillium Flow Technologies. All rights reserved.
WSP and Buzzsaw are trademarks of Trillium Pumps USA SLC LLC.

WSP Self Primer Pump
Version 4, August 2019

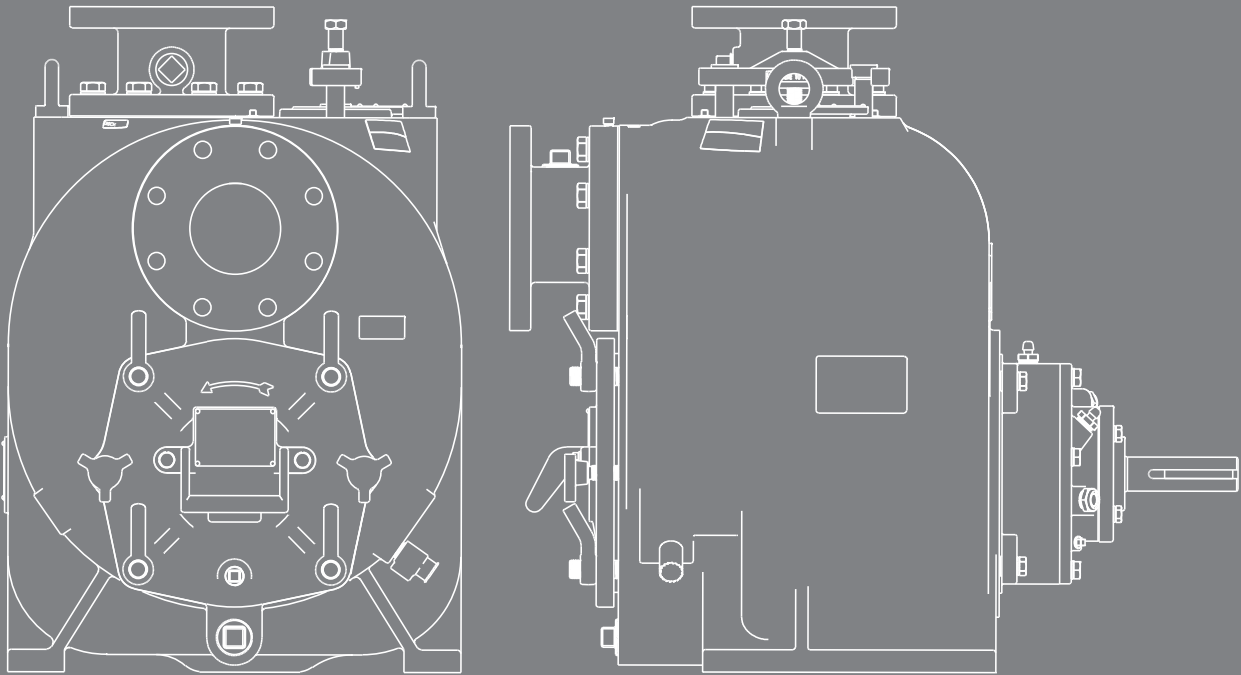

AUSTRALIAN DISTRIBUTOR



CALL 1300 789 466

When Pump Knowledge Matters
www.kelairpumps.com.au